
MOBILE HINGED SUPPORT RAILS

NECESSARY

OPTIONAL SEPARATELY



NECESSARY FOR ALL

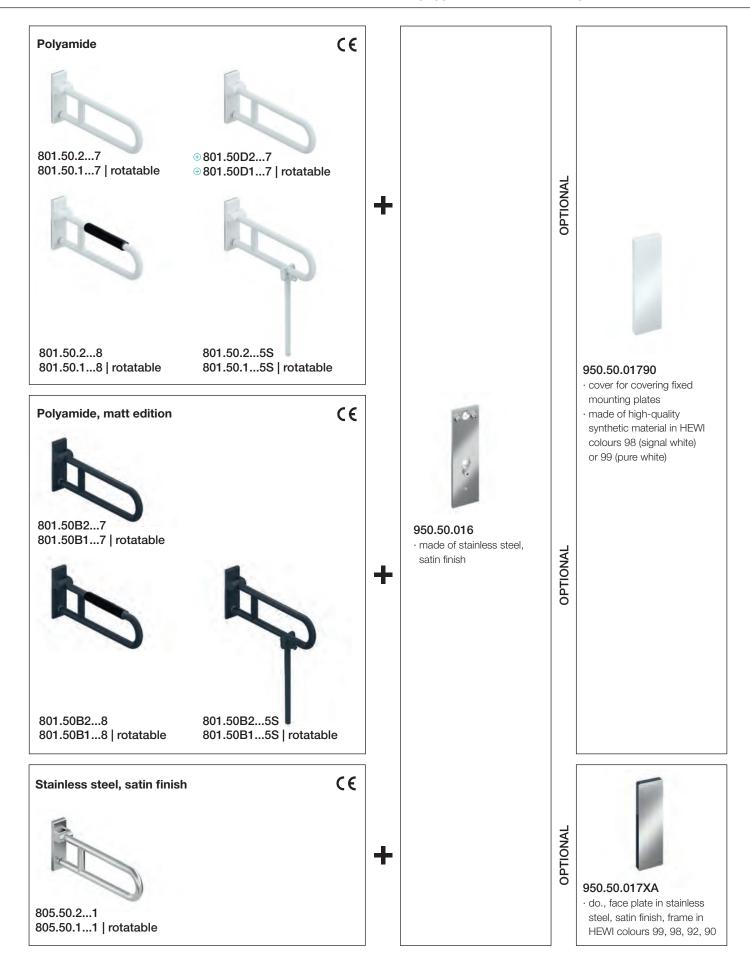

950.50.10190

· set of mounting plate 950.50.016 and cover 950.50.01790



· set of mounting plate 950.50.016 and cover 950.50.017XA

BM17.2

For fixing on walls made of concrete (> C20/C25) National technical approval number: ETA-11/0493

additionally:

injection mortar (HEWI item No.: 200311) or to be provided on site: injection mortar HIT-HY200A (Hilti) extrusion tool HDM (Hilti)



BM10.2

For fixing on walls made of concrete (> C20/C25)

BM11.2

For fixing on walls made of concrete (> P2)

additionally:

injection mortar (HEWI item No.: 200266) conical drill bit (HEWI item No.: 171041) or to be provided on site: injection mortar HIT-HY 270 (Hilti) extrusion tool HDM (Hilti) conical drill bit TE-C PB 22/100 (Hilti)

BM12.2

For fixing on lightweight walls with rear lining made of laminated timber boards (with waterproof bonding, at least 30 mm thick required, e.g. studs or prewall installation)



BM13.2

For fixing on lightweight walls with integrated steel plates (e.g. studs or pre wall installation)

BM18.2

For fixing on walls made of:

- · solid bricks
- · perforated calcium silicate block
- · hollow concrete block
- · vertically perforated bricks
- · hollow lightweight concrete block
- · lightweight aggregate concrete with open structure

National technical approval number:

ETA-13/1036

additionally:

injection mortar (HEWI item No.: 200266)

or to be provided on site: injection mortar HIT-HY 270 (Hilti) extrusion tool HDM (Hilti)



801.50.011

· Upgrade kit toilet roll holder

801.50.060

· Upgrade kit WC flushing mechanism (radio-controlled)

950.50.021XA 950.50.023XA 950.50.027XA

· Floor support

DPTIONAL

for active+

⊕ 801.50D011

· Upgrade kit toilet roll holder

⊕801.50D060

· Upgrade kit WC flushing mechanism (radio-controlled)

for matt edition

801.50B011

· Upgrade kit toilet roll holder

801.50B060

· Upgrade kit WC flushing mechanism (radio-controlled)

950.50B021XA 950.50B023XA 950.50B027XA

· Floor support

DPTIONAL

DPTIONAL

805.50.015

· Upgrade kit toilet roll holder

805.50.060

· Upgrade kit WC flushing mechanism (radio-controlled)

950.50.022XA 950.50.024XA

· Floor support

