


BACKREST RAILS


STATIONARY HINGED SUPPORT RAILS

NECESSARY FOR ALL

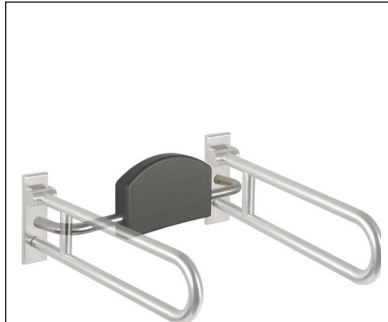

**805.51.900**

- c to c 670-730 mm adjustable on site
- 150 mm deep
- double-sided mounting
- padding made of black PUR
- rails made of stainless steel, satin finish




**805.51.920R (right)**  
**805.51.920L (left)**

- c to c 670-730 mm adjustable on site
- 150 mm deep
- one-sided installation
- padding made of black PUR
- rails made of stainless steel, satin finish

+

**Stainless steel, satin finish** CE



**805.50.2...**  
**805.50.1... | rotatable**

+

**BM10.2.1 (on both sides)**  
**BM10.2.2 (one-sided)**  
For fixing on walls made of concrete (> C20/C25)  
National technical approval number: ETA-11/0493

**BM11.2.1 (on both sides)**  
**BM11.2.2 (one-sided)**  
For fixing on walls

**with mesh sleeve ø 18 mm**

- hollow concrete block
- vertically perforated bricks
- hollow lightweight concrete block
- lightweight aggregate concrete with open structure

**without mesh sleeve**

- solid bricks
- perforated calcium silicate block

**with mesh sleeve ø 22 mm**

- autoclaved aerated concrete (> P2)

**BM12.2.1 (on both sides)**  
**BM12.2.2 (one-sided)**  
lightweight walls with rear lining made of laminated timber boards (with waterproof bonding, at least 30 mm thick required, e.g. studs or pre wall installation)

**BM13.2.1 (on both sides)**  
**BM13.2.2 (one-sided)**  
lightweight walls with integrated steel plates (e.g. studs or pre wall installation)