



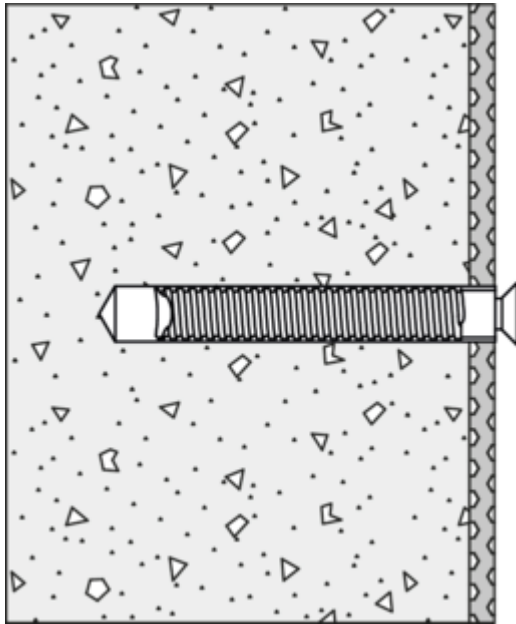

Dimensions in mm

### Properties

Fixing type

- for stationary support and hinged support rails 950...  
for fixing on walls made of concrete (> C20/C25)

Consisting of:

- 3 stainless steel screws M 10 x 30 mm
- 3 female threaded sleeves M 10 x 110 mm
- 1 washer diameter 22 x 5 mm

National technical approval number: ETA-11/0493

To be provided additionally:

Injection mortar (HEWI order No.: 200311)

or to be provided on site:

Hilti HIT-HY 200-A injection mortar