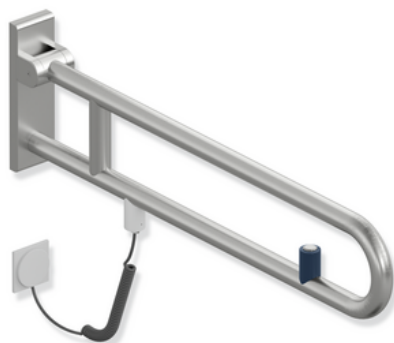


Dimensions in mm

Properties

805 Classic range mobile hinged support rail (rotatable)

- with integrated flush release, model E
- Two parallel rails, arranged on top of each other, and joined together by a connecting arch (formed from a continuous tube)
- Used for holding and supporting
- Can be folded upwards and, folded downwards with braking mechanism, in raised position can be turned to left or right towards the wall
- for mobile use
- for easy and flexible retrofitting on existing, preassembled mounting plate: 950.50.016, must be ordered separately
- toolless and quick installation by simple attachment of the hinged support rail
- secured by fixing screw to prevent unintentional removal
- tested up to 150 kg when used with HEWI fixing material
- Recommended maximum weight of the user: 150 kg
- blue button for triggering the WC flush mechanism
- spiral cable with bare wire ends for wall connection
- Includes white cover for flush-mounted box
- Control voltage max. 30 V = SELV, PELV, switching current up to max. 2 A
- Suitable for all standard concealed cisterns with electrical control
- Projection 850 mm, Height 250 mm and width 75 mm, Rail 33 mm in diameter, pipe thickness 2 mm
- made of high-quality stainless steel, matt satin surface
- Toilet roll holder 805.50.015 and floor supports 950.50.022XA and 950.50.024XA retrofittable
- Produced in accordance with Regulation (EU) 2017/745 on medical devices
- Fulfils the DIN 18040 requirements, ÖNORM B1600/1601 and SIA 500

Certificates

