



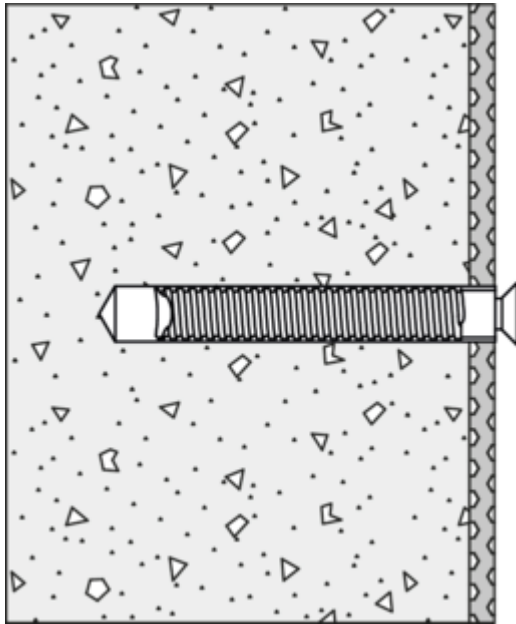

Dimensions in mm

Properties

Fixing type

- for Range 801 / 805 Classic stationary support and hinged supports rails
- for Range 801 / 805 Classic shower spray guards
- for hinged seats 950...

for fixing on walls made of concrete (> C20/C25)

Consisting of:

- 2 stainless steel screws M 10 x 30 mm
- 2 internal thread sleeves M 10 x 110 mm

National technical approval number: ETA-11/0493

To be provided additionally:

Injection mortar (HEWI order No.: 200311)

or to be provided on site:

Hilti HIT-HY 200-A injection mortar