



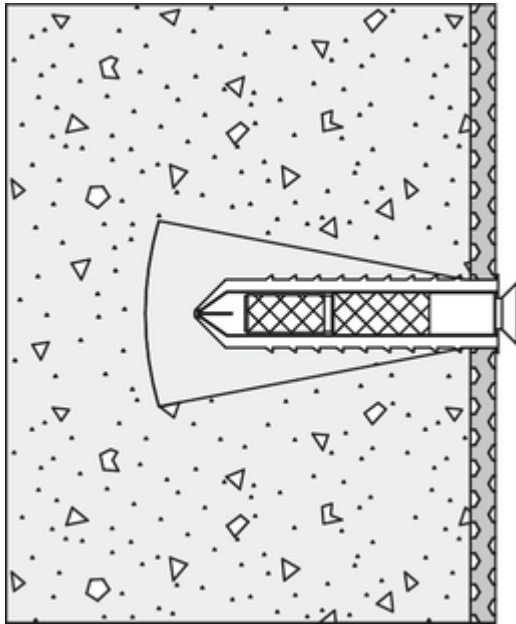

Dimensions in mm

### **Properties**

#### **Fixing type**

- for Range 802 LifeSystem backrest rails with rose fixing
- For fixing on walls made of autoclaved aerated concrete (> P2)

#### **Consisting of:**

- 2 stainless steel screws M 10 x 45 mm
- 2 stainless steel washers
- 2 mesh sleeves Hit-SC 22 x 85 mm
- 2 internal thread sleeves HIT-IC

#### **To be provided additionally:**

Injection mortar (HEWI order No.: 200266)

or to be provided on site:

Hilti HIT-HY 270 injection mortar

Market standard undercut drill 22/100