


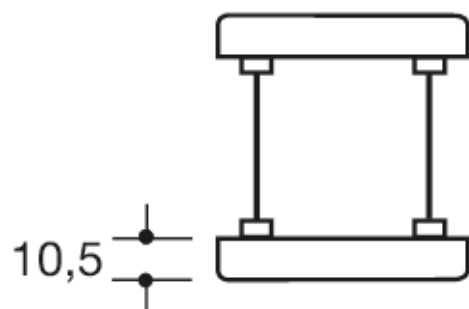

Wymiary w mm

Właściwości

Escutcheon

made of polyamide, solid colour, high-gloss surface, for fire protective doors


Rose substructure made of synthetic material-stainless steel composite, can be used for left and right-hand opening doors. Concealed, non-loosening screwed joint with M5 stainless steel screws sleeve-screw combination as well as the pivot disappearing into the door leaf.

Rose cap round, diameter 55 mm, 10.5 mm high, flat, 1.5 mm wall thickness.

supplied incl. screws

Kolory / Powierzchnie

	99 (czysta biel)
	98 (sygnał biały)
	97 (jasnoszary)
	95 (szary kamień)

	92 (szary antracytowy)
	90 (czerni jetowa)
	50 (stalowoniebieski)
	33 (rubinowa czerwień)

	18 (żółta musztarda)
---	----------------------