


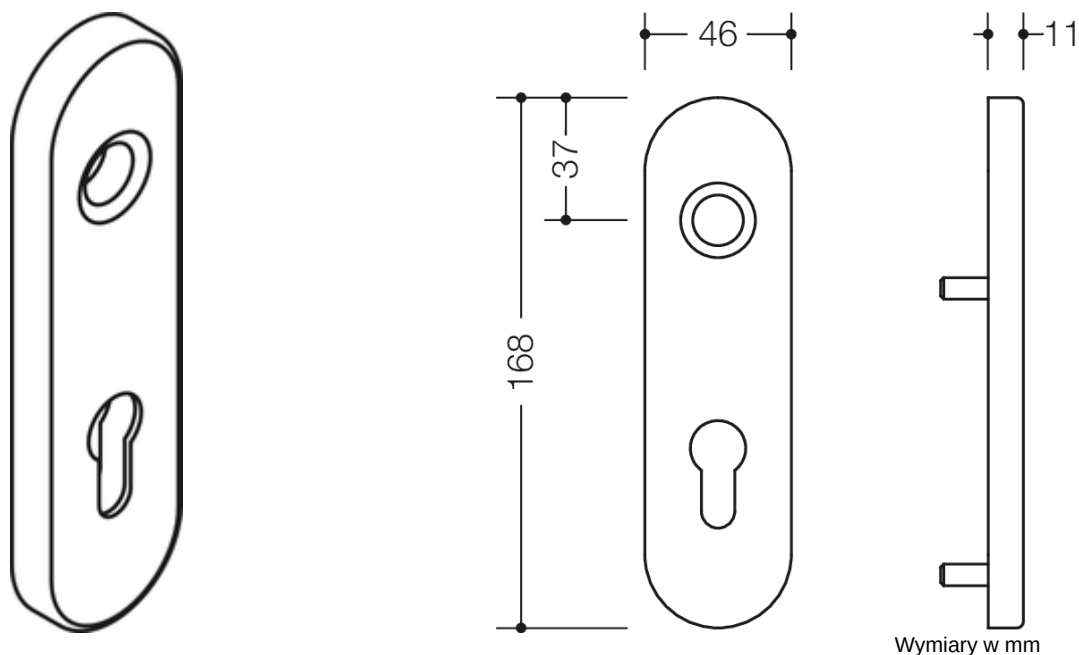

### Właściwości

Backplate, short

long stems, in R-technology made of polyamide, solid colour, high-gloss surface, and for handle diameter 23 mm  
Backplate substructure made of synthetic material-stainless steel composite, can be used for left and right-hand opening doors. Concealed, non-loosening screwed joint with M4 screw and sleeve combination as well as the pivot disappearing into the door leaf.

Backplate cap 46 x 168 mm, 11 mm high, flat, 1.5 mm wall thickness.


Supplied without screws

### Certyfikaty



### Kolory / Powierzchnie

|                                                                                     |                   |
|-------------------------------------------------------------------------------------|-------------------|
|  | 99 (czysta biel)  |
|  | 98 (sygnał biały) |
|  | 97 (jasnoszary)   |
|  | 95 (szary kamień) |

|                                                                                     |                        |
|-------------------------------------------------------------------------------------|------------------------|
|  | 92 (szary antracytowy) |
|  | 90 (czerni jetowa)     |
|  | 50 (stalowoniebieski)  |
|  | 33 (rubinowa czerwień) |

|                                                                                       |                      |
|---------------------------------------------------------------------------------------|----------------------|
|  | 18 (żółta musztarda) |
|---------------------------------------------------------------------------------------|----------------------|