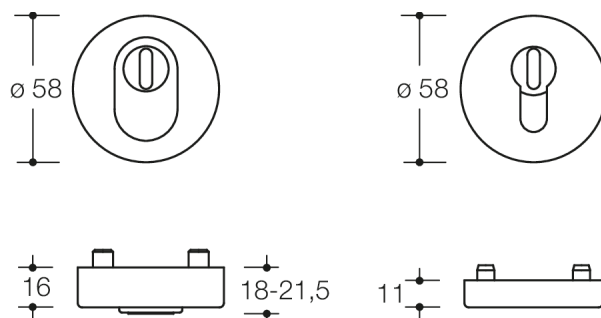
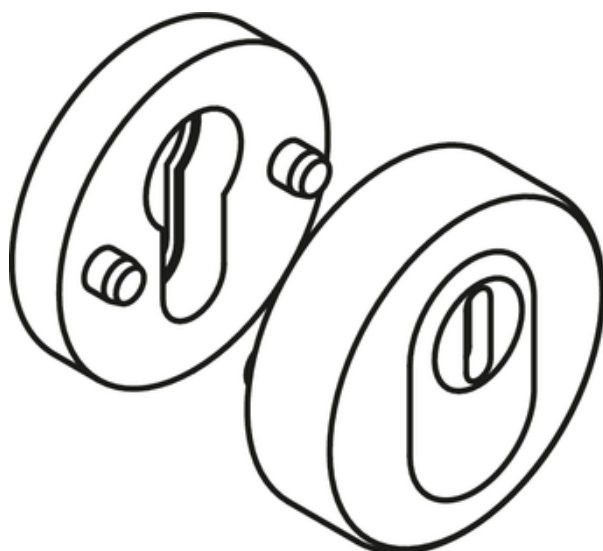




Wymiary w mm

### Właściwości

RC security escutcheon made of polyamide-steel composite with cylinder cover, external rose diameter 58 mm, 16 mm high, base part with integrated cylinder cover with supporting enclosure, conically shaped as protection against forced twisting off additional anti-drill protection implemented as an anti-drill protection plate with dimensions 32 mm x 74 mm. The anti-drill protection plate must be fixed, by bonding onto the lockcase with adhesive, in the area of the Euro cylinder before mounting the lock. Internal rose FS version, diameter 55 mm, 10.5 mm high, concealed screw fixing, for double-sided installation, supplied with screws M 5, holes for Euro cylinder (PZ), for cylinder overhang: 10.5 - 15 mm.




The security escutcheon conforms to the requirements of DIN 18273

Protection class: ES 1 to DIN 18257, can be used on burglar resistant elements to EN 1627-1630

### Certyfikaty



### Kolory / Powierzchnie

|                                                                                     |                   |                                                                                     |                        |                                                                                       |                      |
|-------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|------------------------|---------------------------------------------------------------------------------------|----------------------|
|  | 99 (czysta biel)  |  | 92 (szary antracytowy) |  | 18 (żółta musztarda) |
|  | 98 (sygnał biały) |  | 90 (czerń jetowa)      |                                                                                       |                      |
|  | 97 (jasnoszary)   |  | 50 (stalowoniebieski)  |                                                                                       |                      |
|  | 95 (szary kamień) |  | 33 (rubinowa czerwień) |                                                                                       |                      |