


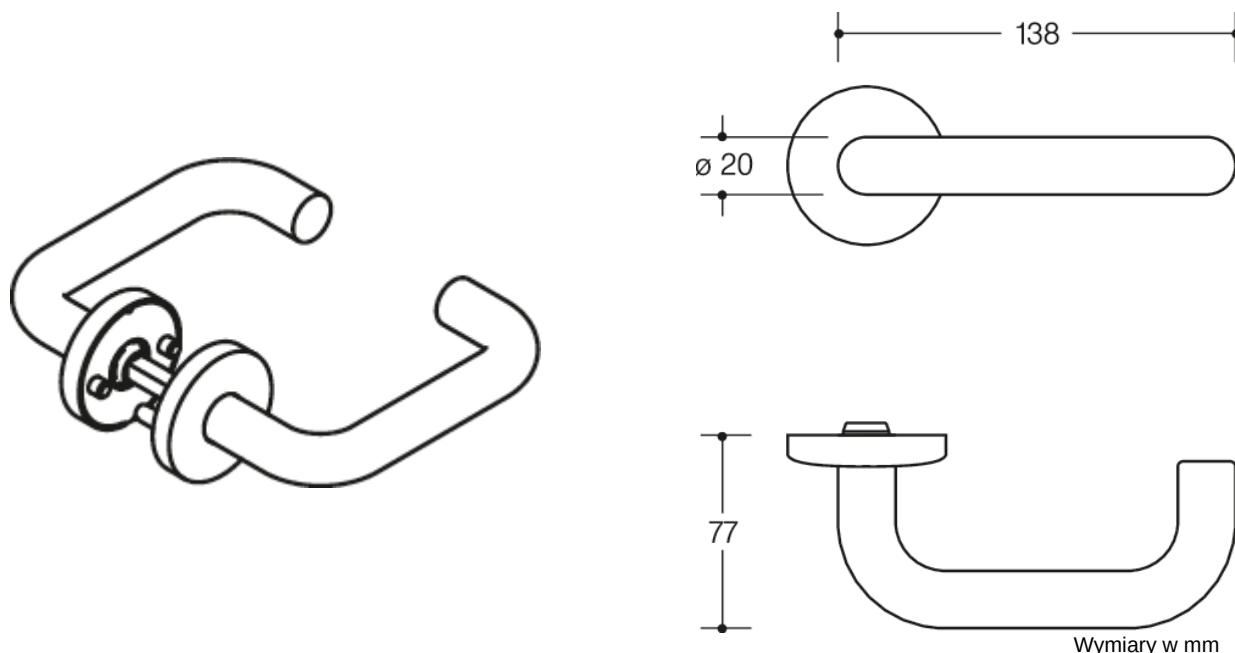

Właściwości

Lever handle for glass door locks

in R-technology with roses according to DIN 18255 and EN 1906 made of polyamide, high-polished surface, consisting of:

Lever handle 111R U-shaped made of high-quality polyamide with corrosion resistant steel insert, solid colour, diameter 20 mm, with stepped shoulder guide and groove, easily installed by latching the lever handle into the base parts pre-mounted on the door. The latching can be released using the dismantling tool. Fits Dorma Junior Office and Schlechtendahl Atelier F / R and Studio - Private Line. The locks are prepared for rose fixing.

The lever handle meets the standards of EN 179 and DIN 18040.

Roses: model 305.20R, substructure made of synthetic material-stainless steel composite, can be used for left and right-hand opening doors. Fixed rotating bearing of the lever handle with automatically latching all-round locking and 5 mm journal as maintenance-free plain bearing with elastic compensating area and second journal in the neck of the lever handle. Concealed, non-loosening screwed joint with M4 screw and sleeve combination as well as the pivot disappearing into the lock.

Rose cap, round, made of high-quality polyamide, solid colour, diameter 55 mm, 10 mm high, 1.5 mm wall thickness.

Wyróżnienia



Certyfikaty



Kolory / Powierzchnie

	99 (czysta biel)
	98 (sygnał biały)
	97 (jasnoszary)
	95 (szary kamień)

	92 (szary antracytowy)
	90 (czerni jetowa)
	50 (stalowoniebieski)
	33 (rubinowa czerwień)

	18 (żółta musztarda)
--	----------------------