
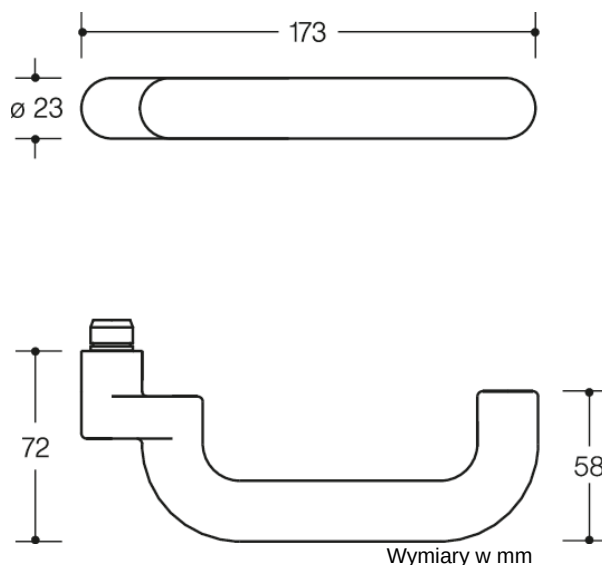


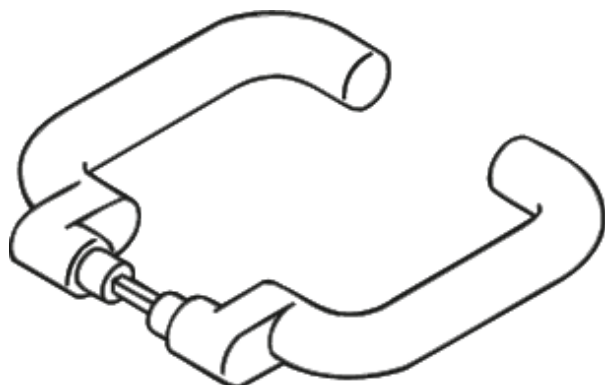

### Właściwości

Pair of levers in R-technology:

Lever handle 114.23GKR in U-shaped made of high-quality polyamide with corrosion resistant steel insert, solid colour diameter 23 mm with stepped shoulder guide and groove. Installed by simply latching the lever handle into the base parts preassembled on the door. The lever fulfils the guidelines of the German Federal Association of Accident Insurance Funds (Bundesverband der Unfallkassen e. V. - BUK) - safe distance from the closing edge 25 mm.

The lever handle meets the standards of EN 179 and DIN 18040.

With square spindle 8, 8.5, 9 or 10/8 mm stepped

Compatible with the following roses and backplates:

315.23R

Sustainability: EPD Environmental Product Declaration

### Wyróżnienia



### Certyfikaty



### Kolory / Powierzchnie

|                   |                        |                        |                        |
|-------------------|------------------------|------------------------|------------------------|
| 99 (czysta biel)  | 92 (szary antracytowy) | 74 (jabłko zielone)    | 36 (koral)             |
| 98 (sygnał biały) | 90 (czerń jetowa)      | 72 (może być zielony)  | 33 (rubinowa czerwień) |
| 97 (jasnoszary)   | 86 (piasek)            | 55 (błękit akwaticzny) | 24 (pomarańczowy)      |
| 95 (szary kamień) | 84 (umbra)             | 50 (stalowoniebieski)  | 18 (żółta musztarda)   |