




Similar picture

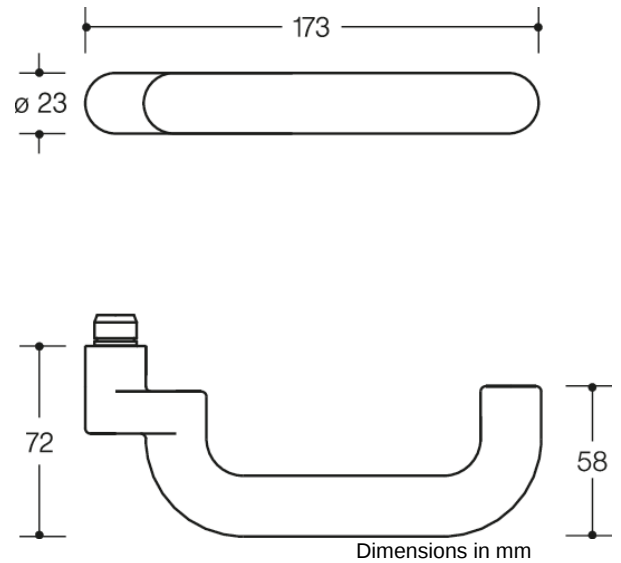

Properties

Lever handle female part in R-technology:

Lever handle 114.23GKR in U-shaped made of high-quality polyamide with corrosion resistant steel insert, solid colour diameter 23 mm with stepped shoulder guide and groove. Installed by simply latching the lever handle into the base parts preassembled on the door. The lever fulfils the guidelines of the German Federal Association of Accident Insurance Funds (Bundesverband der Unfallkassen e. V. - BUK) - safe distance from the closing edge 25 mm.

The lever handle meets the standards of EN 179 and DIN 18040.

For spindle 8, 8.5, 9 or 10/8 mm stepped

Compatible with the following roses and backplates:

315.23R

Certificates



Colours / Surfaces

| | | | |
|---|---|--|---|
|  18 (mustard yellow) |  50 (steel blue) |  86 (sand) |  97 (light grey) |
|  24 (orange) |  55 (aqua blue) |  90 (jet black) |  98 (signal white) |
|  33 (ruby red) |  72 (may green) |  92 (anthracite grey) |  99 (pure white) |
|  36 (coral) |  84 (umber) |  95 (stone grey) |  74 (apple green) |