




Mode of operation: One-sided mounting (half-set). Door has a fixed opening direction (can not be pushed). Suitable as an operating element on doors according to DIN 18040, with accessible operating function in the operating range 850 mm top edge of finished floor. Flexible gripping height from 750 mm to 1200 mm above the top edge of the finished floor.

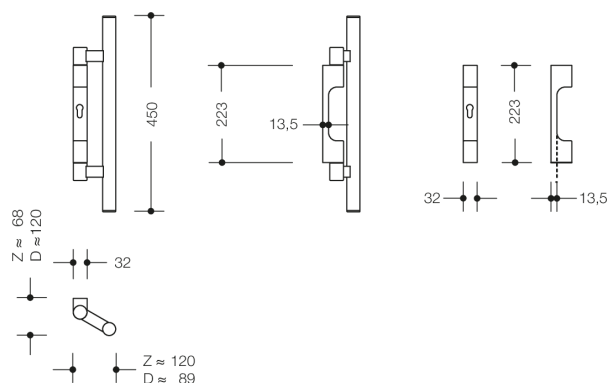