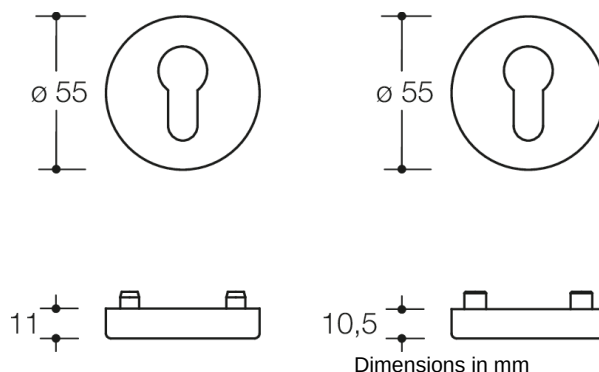




Similar picture





Properties

Security rose in polyamide matt steel composite design
external rose, diameter 55 mm, 10.5 mm, high, lower part, conical design, as protection against violent twisting
Interior rose FS version, diameter 55 mm, 10.5 mm high,
concealed, for paired mounting, delivery with screws M 5,
holes for profile cylinder (PZ and KABA), for cylinder projections: 7 - 12 mm
The security rose corresponds to the specifications of DIN 18273.

Certificates



Colours / Surfaces

	99 (pure white)
	90 (jet black)