




Similar picture



Properties

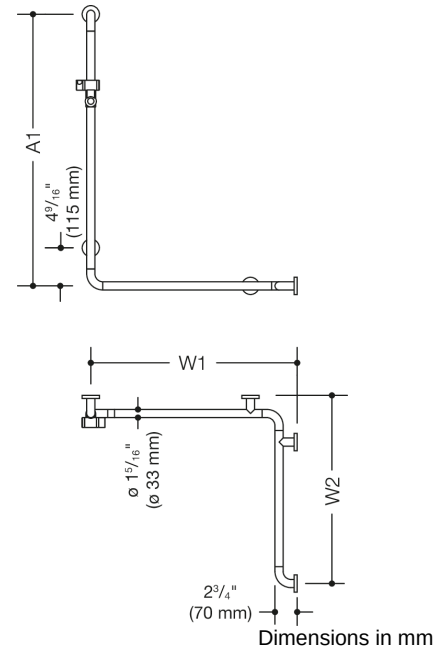



Shower grab rail (USA) from Range 801




- vertical and horizontal bars joined at right-angles with fixing roses made of steel
- vertical length made-to-measure from 23 5/8 inch (600 mm) to 49 3/16 inch (1250 mm), horizontal length made-to-measure from 18 11/16 inch (475 mm) to 70 7/8 inch (1800 mm)
- 2 3/4 inch (70 mm) deep, rail diameter 1 5/16 inch (33 mm), rose diameter 2 3/4 inch (70 mm)
- additional support required for lengths above 47 1/4 inch (1200 mm) as spacings between supports may not exceed 33 7/16 inch (850 mm)
- with continuous, corrosion resistant steel core
- for wall mounting with special HEWI fixing materials and roses
- can be mounted in left hand or right hand position
- maximum loading capacity 330 lbs (150 kg)
- use for removable hanging seats 801.51US100 (W1/W2 = min. 25 3/4 inch (650 mm)) and 801.51US110 (W1/W2 = min. 29 1/2 inch (750 mm))
- removable hanging seats only conditionally usable, if W1 or W2 = 40 15/16 inch (1040 mm) to 70 7/8 inch (1800 mm)
- made of high-quality polyamide in HEWI colours 99 (pure white), 95 (stone grey), 92 (anthracite grey), 90 (jet black), 86 (sand), 84 (umber) and 33 (ruby red)
- meets requirements according to 2010 ADA standards and ICC / ANSI A117.1-2017

Awards



Colours / Surfaces

	99 (pure white)
	95 (stone grey)
	92 (anthracite grey)
	90 (jet black)

	86 (sand)
	84 (umber)
	33 (ruby red)