Zestaw klamek do drzwi profilowych HEWI
111R51.240

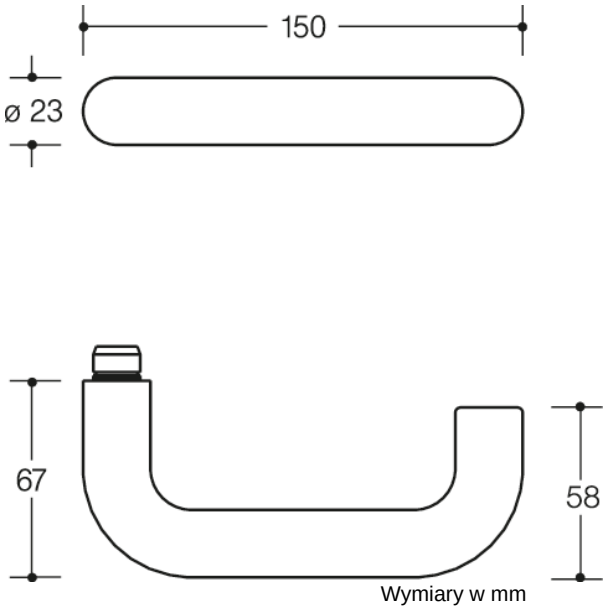

Właściwości
Fitting for framed doors
in R-technology with roses according to DIN 18255 and EN 1906 made of polyamide, high-polished surface, consisting of:
Lever handle model 111.23R U-shaped made of high-quality polyamide with corrosion resistant steel insert, solid colour, diameter 23 mm, with stepped shoulder guide and groove, easily installed by latching the lever handle into the base parts pre-mounted on the door.
The latching can be released using the dismantling tool. The lever handle meets the standards of EN 179 and DIN 18040.
Rose: model 315.23R, rose substructure made of synthetic material-stainless steel composite, can be used for left and right-hand opening doors. Fixed rotating bearing of the lever handle with automatically latching all-round locking and 5 mm journal as maintenance-free plain bearing with elastic compensating area and second journal in the neck of the lever handle. Concealed, non-loosening screwed joint.
Rose cap, oval, made of polyamide, solid colour, 32 x 72 mm, 12 mm high, flat, 1.5 mm wall thickness.
Designed and tested for the projects segment, user category to EN 1906 - Class 4 fitting with spindle 8 - 8.5 mm
user category: Class 4
Durability: Class 7
Door weight: No classification specified
Fire resistance: Class 0
Safety: Class 1
Corrosion resistance: Class 5
Burglary protection: Class 0
Design-type: U
Sustainability: EPD Environmental Product Declaration

Wyróżnienia

Certyfikaty

HEWI Heinrich Wilke GmbH
Sp. z o.o. Oddz. w Polsce
Ul. Puławska 354/356
02-819 Warszawa
Tel.: 22 330 00 51
info@hewi.pl
www.hewi.com

Kolory / Powierzchnie

- 99 (czysta biel)
- 98 (sygnał biały)
- 97 (jasnoszary)
- 95 (szary kamień)
- 92 (szary antracytowy)
- 90 (czerń jetowa)
- 50 (stalowoniebieski)
- 33 (rubinowa czerwień)
- 18 (żółta musztarda)

HEWI Heinrich Wilke GmbH
Sp. z o.o. Oddz. w Polsce
Ul. Puławska 354/356
02-819 Warszawa
Tel.: 22 330 00 51
info@hewi.pl
www.hewi.com